

T11A

Double-Coupling IP68 Modular LED Street Lights



- White
- Black
- Gray
- Blue




T11A LED Street Lights


[Main Features]

- Modular pluggable technology, easy tool onsite maintenance;
- Honeycomb and whole structure cooling technology, high efficient heat dissipation;
- Double-coupling IP68 protection, highest waterproof level;
- Intelligent constant current driving technology, long life span;
- Ergonomic light distribution to achieve uniform illuminating effect;
- Free modular serialization and full power range solutions.

[Lighting Distribution Curve]

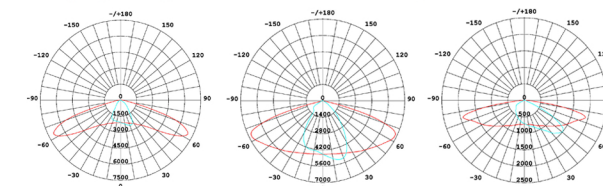

T1S3501 IESNA Type I Short, T1S3100 IESNA Type I Short, T3M3910 IESNA Type III Medium

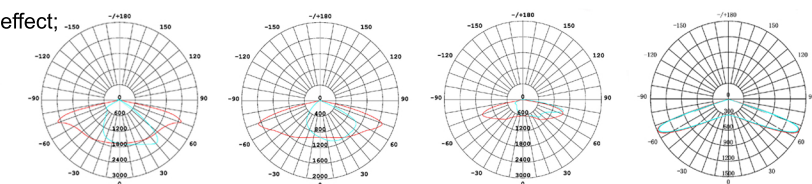

T2M3702 IESNA Type II Medium, T3M2701 IESNA Type III Medium, T4M5703 IESNA Type IV Medium, T5S3040 IESNA Type VS Short

[Technical Parameters]

Input Voltage	Power Efficiency	Power Factor	Junction Temperature	CRI	Working Environment	Storage Temperature
AC100V-277V	91%	0.95	<80C	Ra ≥ 70	-40C ~ +50C 10% ~ 90%RH	-40C ~ +50C

LED Life Span	Surge Protection	CCT	LED Brand	Installation Diameter	Material	IP Rating
>60,000 hours	10KV/5KA	3000K, 4000K, 5000K, 5700K	Lumileds	57,~63mm	Aluminium Alloy	LED Module IP68 Power Supply IP67

Model	System Power (W)	LM/W (Ultra High)	LM/W (High)	Initial Lumens (Ultra High)	Initial Lumens (High)	Product Size (mm)	Packaging Dimensions (mm)	N.W. (Kg)	G.W. (Kg)
T11A-1	40	110	100	4400	4000	595x330x91	690x430x170	6.5	7.8
	50	105	95	5250	4750	595x330x91	690x430x170	6.5	7.8
	60	100	90	6000	5400	595x330x91	690x430x170	6.5	7.8
T11A-2	80	110	100	8800	8000	645x330x91	740x430x170	8.0	9.3
	100	105	95	10500	9500	645x330x91	740x430x170	8.0	9.3
T11A-3	120	110	100	13200	12000	725x330x91	820x430x170	9.0	10.4
	150	105	95	15750	14250	725x330x91	820x430x170	9.0	10.4
T11A-4	180	100	90	18000	16200	725x330x91	820x430x170	9.0	10.4
	160	110	100	17600	16000	805x330x91	900x430x170	10.5	12.0
T11A-5	200	105	95	21000	19000	805x330x91	900x430x170	10.5	12.0
	240	100	90	24000	21600	805x330x91	900x430x170	10.5	13.1
T11A-6	200	110	100	22000	20000	885x330x91	980x430x170	11.5	13.6
	250	105	95	26250	23750	985x330x91	1080x430x170	12.0	13.6
T11A-7	300	100	90	30000	27000	985x330x91	1080x430x170	12.0	14.7
	240	110	100	26400	24000	1065x330x91	1160x430x170	13.0	14.7
T11A-8	300	105	95	31500	28500	1065x330x91	1160x430x170	13.0	14.7
	360	100	90	36000	32400	1065x330x91	1160x430x170	13.0	14.7
T11A-9	280	110	100	30800	28000	1145x330x91	1240x430x170	15.0	16.8
	350	105	95	36750	33250	1145x330x91	1240x430x170	15.0	16.8