



T3B

Double-Coupling IP68
Modular LED Street Lights

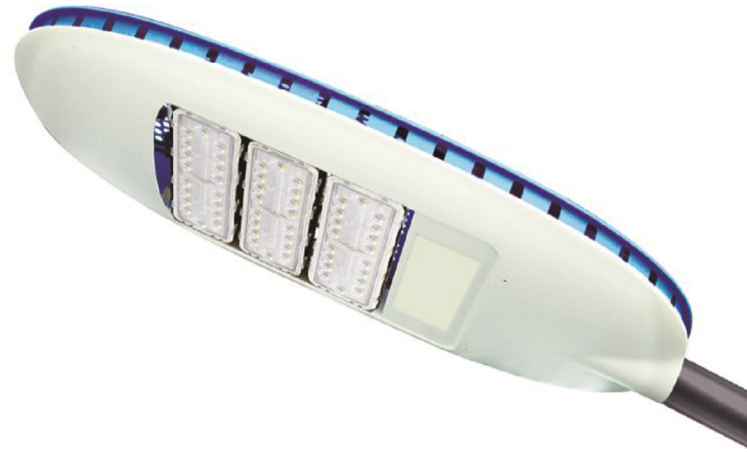

- White
- Yellow
- Red
- Blue




T3B LED Street Lights

[Main Features]

- Modular pluggable technology, easy-tool onsite maintenance;
- Honeycomb briquette burning effect and the whole structure cooling technology;
- Double-coupling IP68 protection for module, highest waterproof level;
- Ergonomic light distribution to achieve uniform illuminating effect.
- Free serialization and various power solutions;
- Street lighting, park lighting, roadway lighting, path lighting.

[Lighting Distribution Curve]

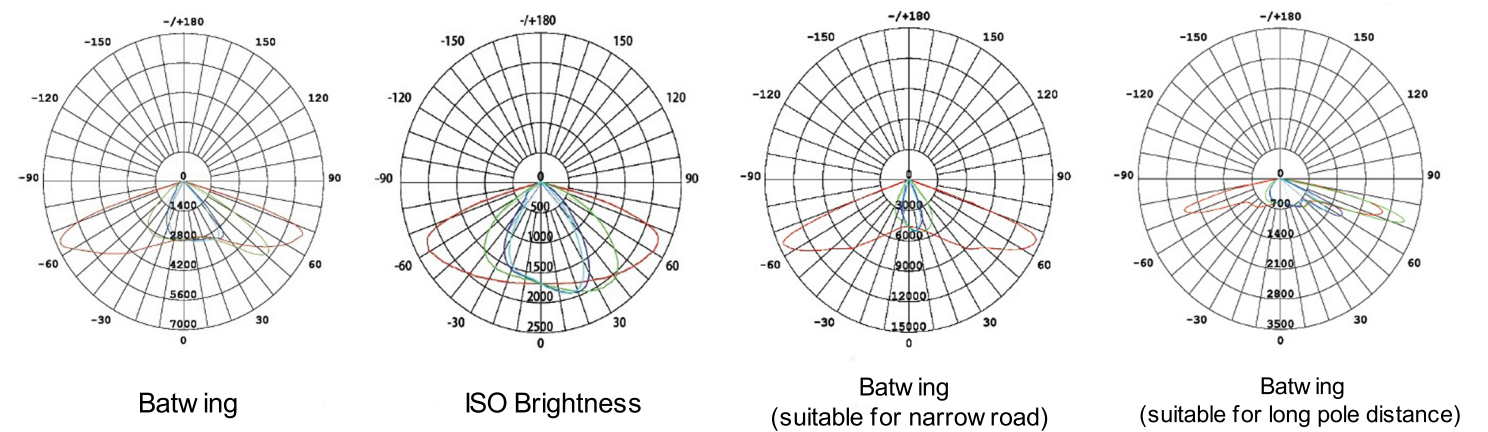

[Technical Parameters]

Input Voltage	Power Efficiency	Power Factor	Junction Temperature	CRI	Working Environment	Storage Temperature
AC100V-277V	91%	0.95	<80C	Ra ≥ 70	-40C ~ +50C 10% ~ 90%RH	-40C ~ +50C

LED Life Span	Surge Protection	CCT	LED Brand	Installation Diameter	Material	IP Rating
>60,000 hours	10KV/5KA	3000K, 4000K, 5000K, 5700K	Lumileds	57 63mm	Aluminium Alloy	LED Module IP68 Power Supply IP67

Model	System Power (W)	LM/W (Ultra High)	LM/W (High)	Initial Lumens (Ultra High)	Initial Lumens (High)	Product Size (mm)	Packaging Dimensions (mm)	N.W. (Kg)	G.W. (Kg)
T3B-1	40	105	100	4200	4000	699x351x80	790x380x165	4.5	5.7
	50	100	95	5000	4750	699x351x80	790x380x165	4.5	5.7
	60	95	90	5700	5400	699x351x80	790x380x165	4.5	5.7
T3B-2	80	105	100	8400	8000	699x351x80	790x380x165	5.6	6.8
	100	100	95	10000	9500	699x351x80	790x380x165	5.6	6.8
T3B-3	120	95	90	11400	10800	699x351x80	790x380x165	5.6	6.8
	120	105	100	12600	12000	699x351x80	790x380x165	6.2	7.4
	150	100	95	15000	14250	699x351x80	790x380x165	6.2	7.4
	180	95	90	17100	16200	699x351x80	790x380x165	6.2	7.4